

Material & Engineering Laboratory-Taipei

TEST REPORT

REPORT NO.: HV-10-05910X PAGE: 1 OF 2 DATE: OCTOBER 14, 2010

YOU XING ENTERPRISE CO., LTD.

NO. 1173-1, JHENSING RD., GUEISHAN TOWNSHIP, TAOYUAN COUNTY 333, TAIWAN

The following merchandi	se was submitted and identified by the vendor as:
Product Description :	Thermally Conductive Tape
Style/Item No. :	TCI-800-25A

We have tested the submitted sample(s) as requested and the following results were obtained : <u>Test Required</u>: (According to client's test specification, please see following sheets in detail.) Dielectric Strength

Test Result :

-PLEASE SEE ATTACHED SHEETS-

Date of Receive : SEPTEMBER 16, 2010

Date of Testing : SEPTEMBER 16, 2010~OCTOBER 14, 2010

Signed for and on behalf of SGS Taiwan Ltd.

Carlos KAO Supervisor

The content of this PDF file is accordance with the original issued reports for reference only. This Test Report cannot be reproduced, except in full, without prior written permission of the Company.此 PDF 電子檔內容係根據原簽發之紙本報告製作,僅供參考用。本報告未經本公司書面同意,不可部份複製。



Material & Engineering Laboratory-Taipei

TEST REPORT

REPORT NO.: HV-10-05910X PAGE: 2 OF 2 DATE: **OCTOBER 14, 2010**

Dielectric Strength

Test Equipment :


Ν	ame	Brand HEWLETT PACKARD	Model 4285A
Precision	n Lcr Meter		
Lab Environmental Condit Ambient temperature:	<u>ions</u> ∶ 23±2℃		
	50±5%RH		

ASTM D149-07a Standard Test Method for Dielectric Breakdown Voltage and Dielectric Strength of Solid Electrical Insulating Materials at Commercial Power Frequencies

Test Result :

19.83 KV/mm (The thickness of the specimen is 0.24mm)

Test Photo:

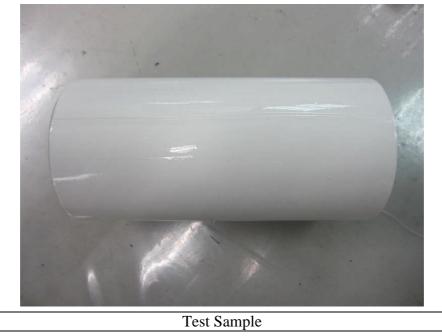

- The End of Test Report -

The content of this PDF file is accordance with the original issued reports for reference only. This Test Report cannot be reproduced, except in full, without prior written permission of the Company.此 PDF 電子檔內容係根據原簽發之紙本報告製作,僅供參考用。本報告未經本公司書面同意,不可部份複製。